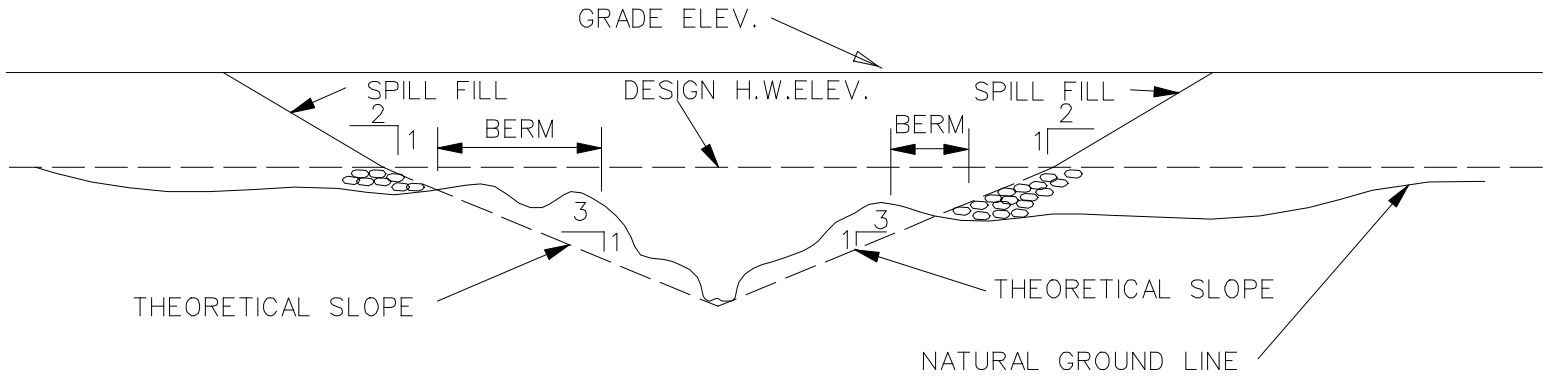

BERMS FOR STABILITY

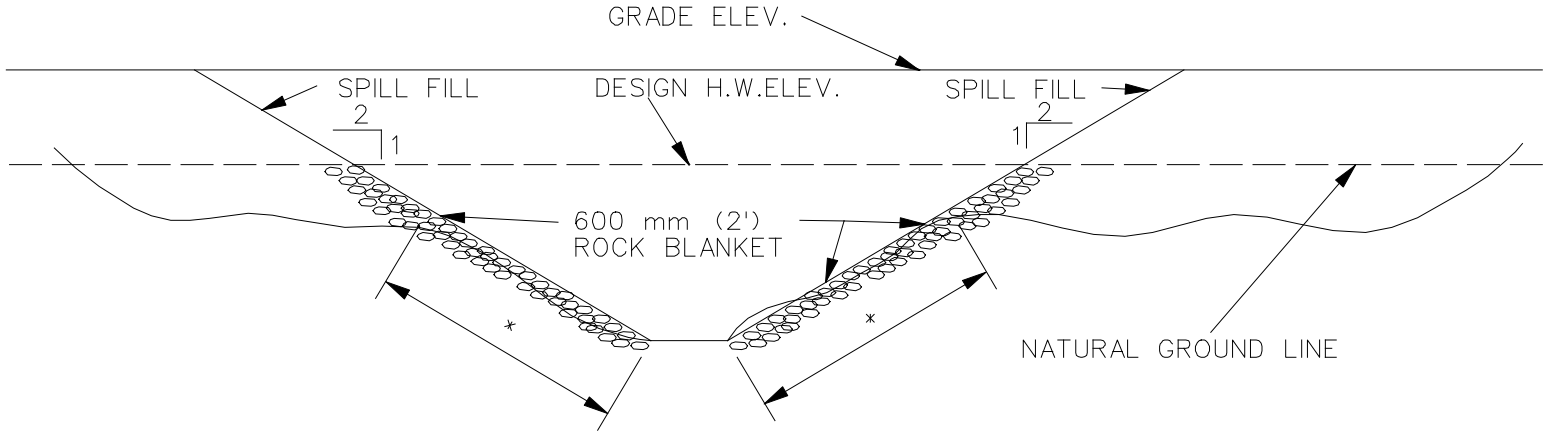

ROCK BLANKET FOR STABILITY

* ROCK BLANKET ON CHANNEL BANKS MUST BE CARRIED UPSTREAM AND DOWNSTREAM FROM BRIDGE LIMITS AND TIED INTO BANKS DOUBLE THICKNESS FOR 1.8 m (6') AT EACH END.

Location of Spill Fills for Abutment Stability (Minimum Bridge Length)

Figure 5-03.1